

ELEMENTS À ENCASTRER



Plaque réfrigérée




Réf.	Code	T° de consigne	Tension	Puiss. (W)	Int. (A)	R404 (g)	Ø câble	Dim. LxP (mm)
PR1GN	1JM00	-8° à -10°C	220 v					400x600
PR3GN	1JM01	-13° à -15°C	220 v	977	3,7	320	1JM01	1100x640
PR4GN	1JM02	-13° à -15°C	220 v	1082	4,1	400	1JM02	1450x640



Plaque vitrocéramique maintien chaud




Réf.	Code	T° de consigne	Tension	Puiss. (W)	Int. (A)	Ø câble	Dim. LxP (mm)
PV1GN	1JM03	60° à 70°	220 v	660	2,5	3x2,5	325x530
PV2GN	1JM04	60° à 70°	220 v	1478	5,6	3x2,5	650x530
PV3GN	1JM05	60° à 70°	220 v	2138	8,1	3x2,5	975x530
PV4GN	1JM05	60° à 70°	220 v	2534	9,6	3x2,5	1300x530

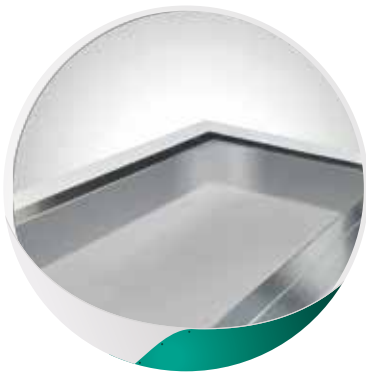

Cuve réfrigérée statique



Réf.	Code	T° de consigne	Tension	Puiss. (W)	Int. (A)	R404 (g)	Ø câble	Dim. LxPxH (mm)
CR3GN	1JN02	3°	220 v	739	2,8	230	3x1,5	1090x640x170
CR4GN	1JN01	3°	220 v	1003	3,8	250	3x1,5	1415x640x170

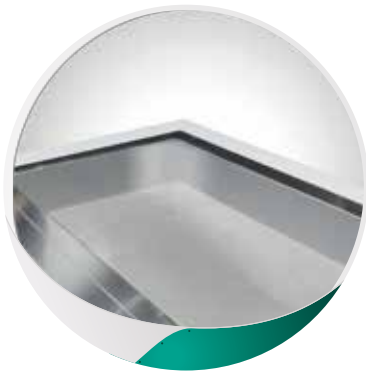

Cuve Bain marie



Réf.	Code	T° de consigne	Tension	Puiss. (W)	Int. (A)	Ø câble	Dim. LxPxH (mm)
CB115	1JN03	70°	220 v	1478	5,6	3x2,5	1090x640x170
CB145	1JN04	70°	220 v	1478	5,6	3x2,5	1415x640x170